

FIG. 1

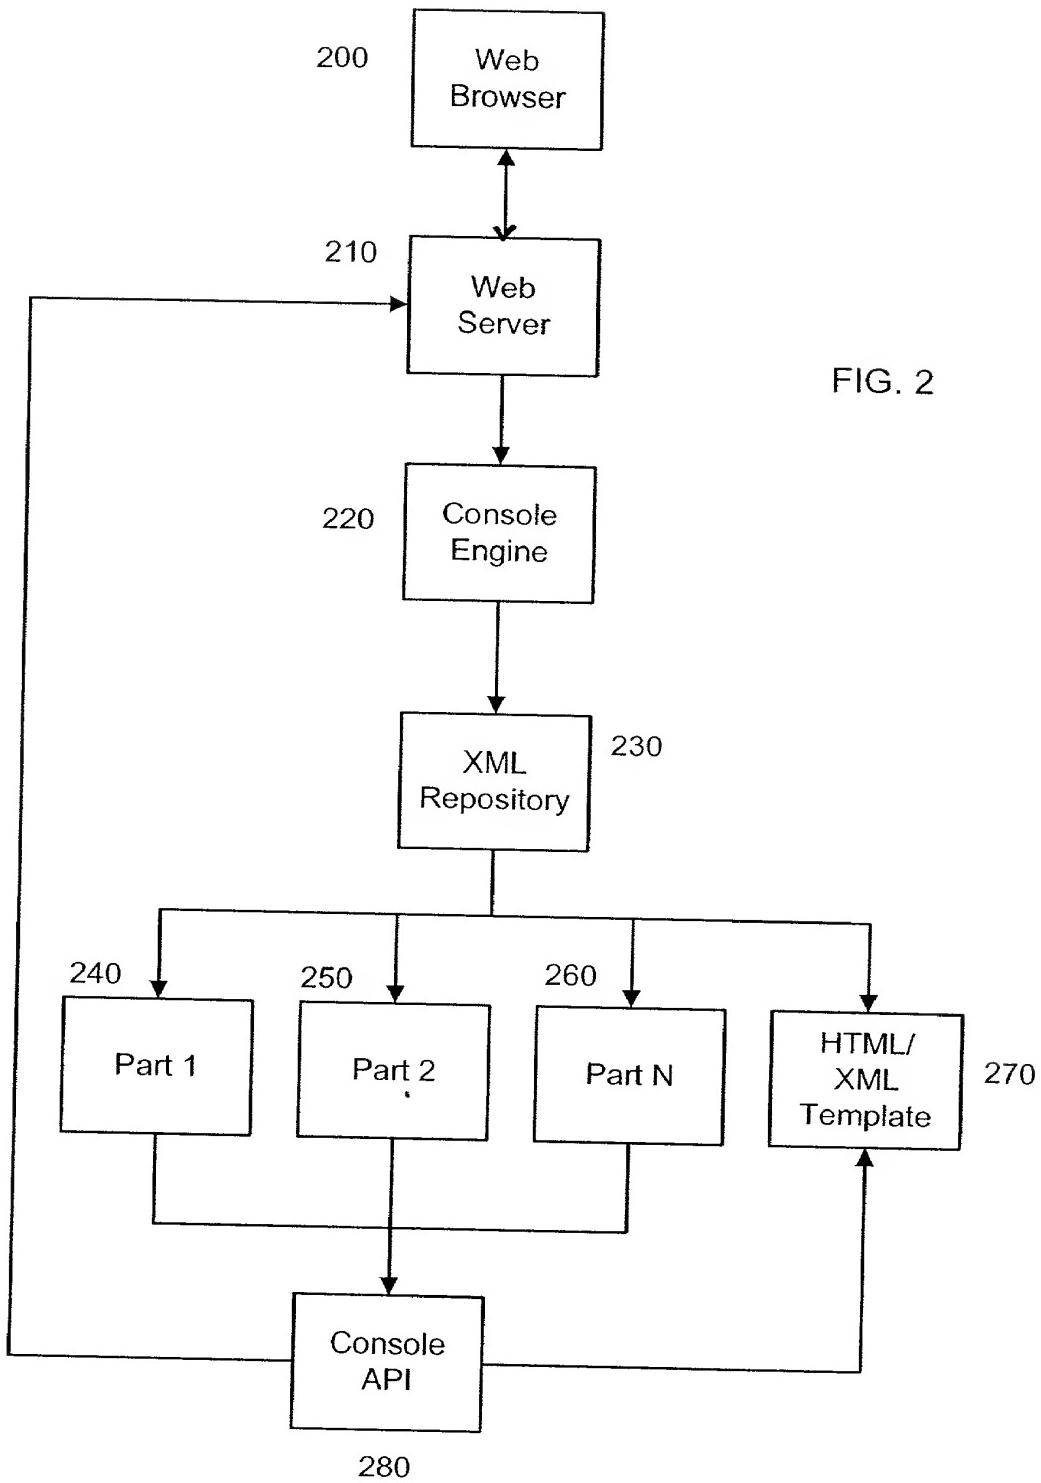


FIG. 2

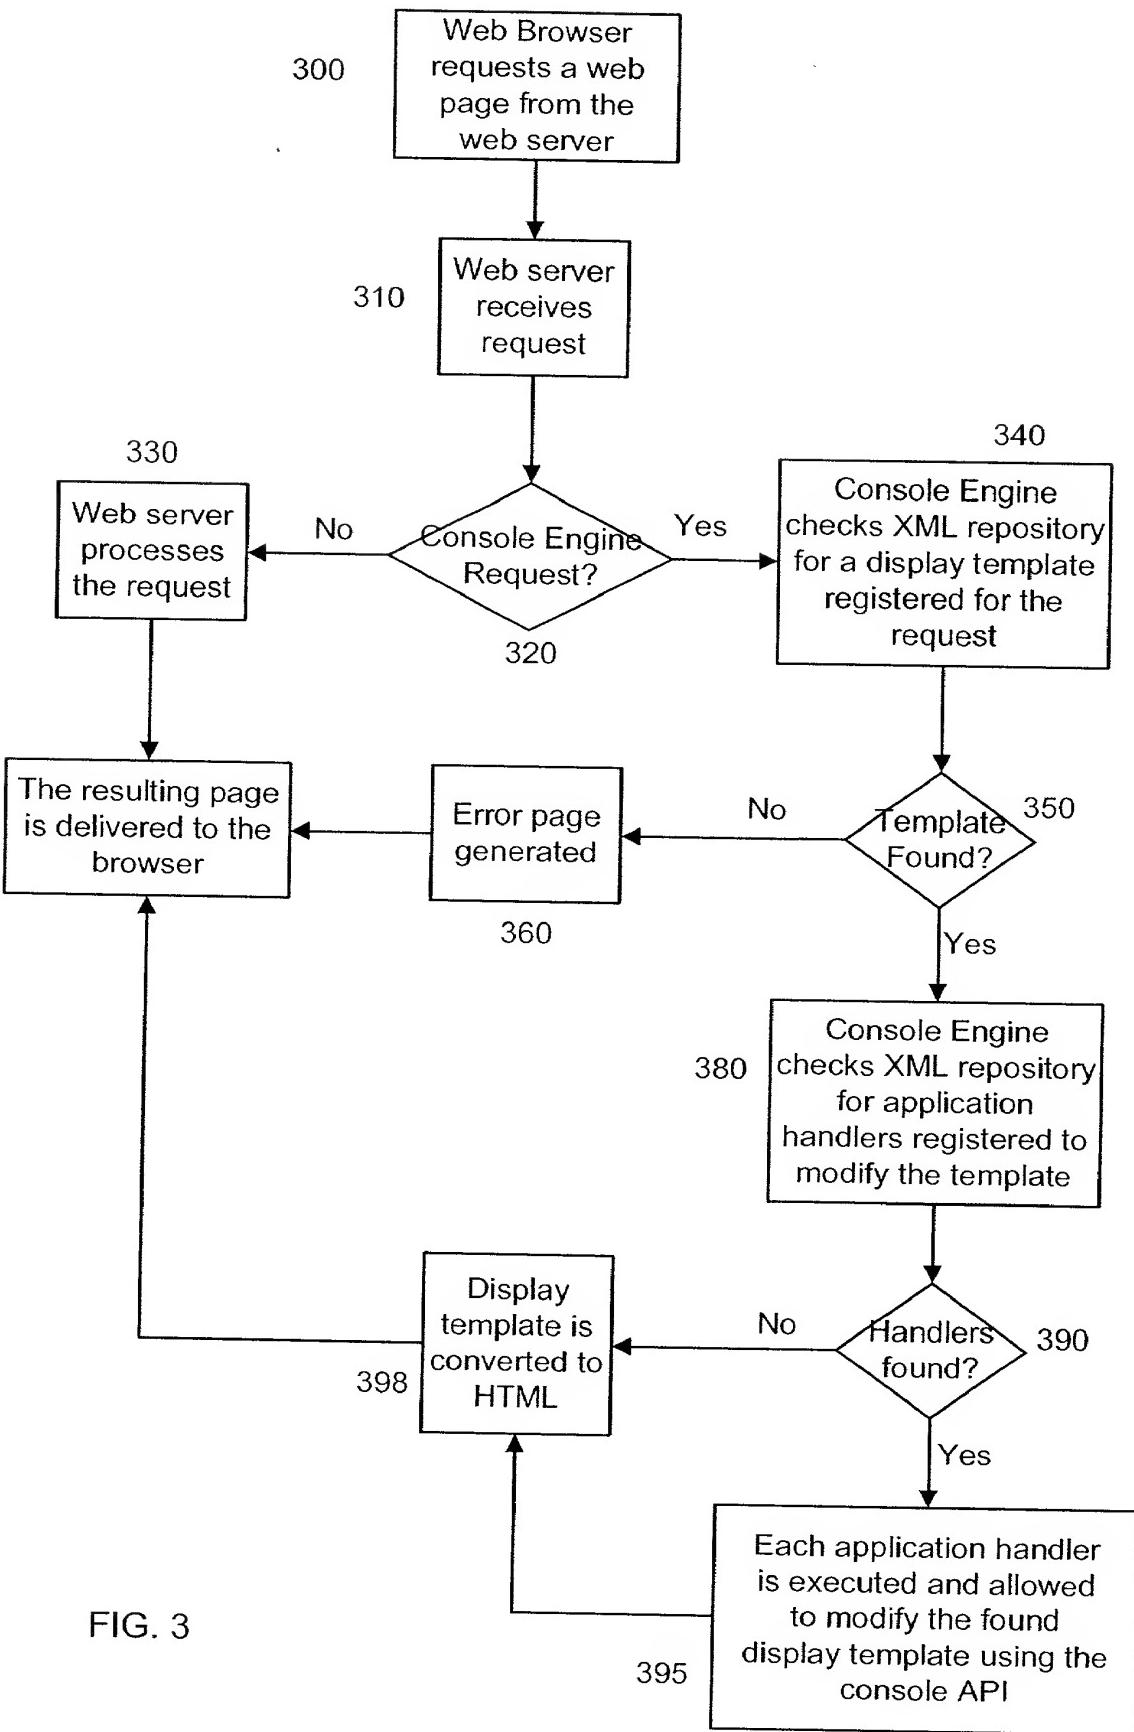



FIG. 3

400 Incoming XML data element/part (IXDE)

410 Initialize XML data element/part (MXDE)

530

520 Concatenate pretoken and, delimited token onto MXDE indicating that token was not in query string.

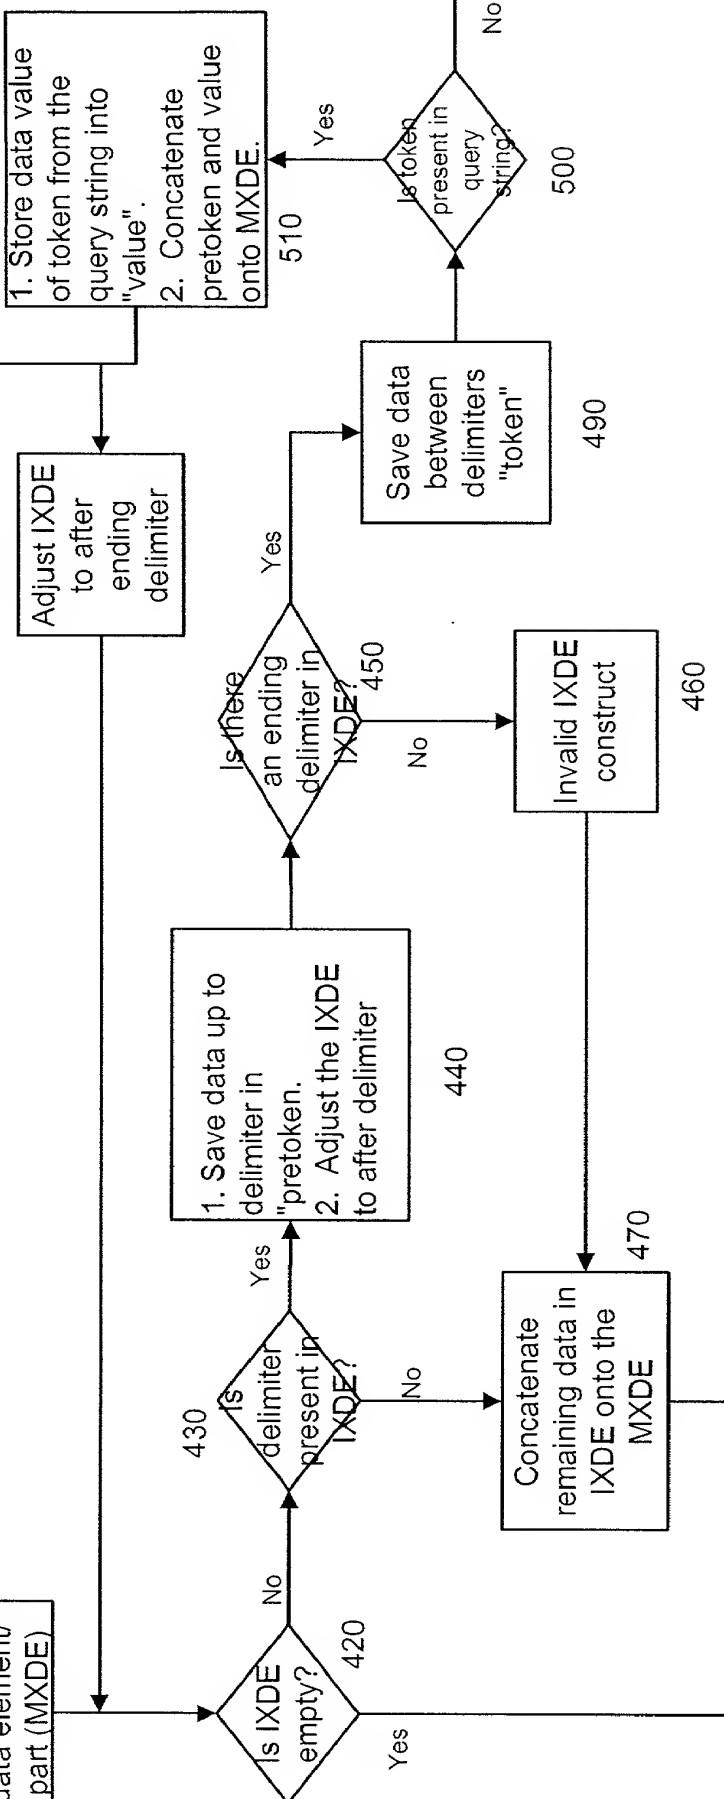

480 Return MXDE for display in the console. MXDE contains the original XML definition with the substituted data derived from the contents of the query string

FIG. 4